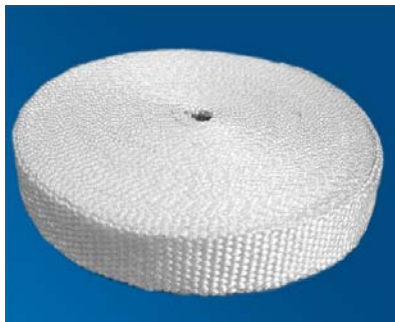


M-211R**Fiberglass Round Rope**

Round Braided from texturized fiberglass yarn, It is used for the material of keeping warm, insulating against heat etc. Fiberglass rope is asbestos free.

Temp. : 550°C
Size : 3.0 mm. - 50 mm.
Packing : 5.0 kg, 10.0 kg/ bag or carton

M-211T**Fiberglass Tape**

Braided with fiberglass, has good insulation and heat resistance, suitable for building, waterproof, antiseptic and wrapping up the coil of electrical machinery and electrical apparatus. It can be with self- adhesive on one side. Wire reinforced is available upon request.

Temp. : 550°C
Thickness : 0.8 mm. - 6.0 mm.
Width : 20 mm. - 200 mm.
Packing : 30 m/ roll

M-211C**Texturized Fiberglass Cloth**

Made of continuous filament texturized yarns, they demonstrate better insulating properties and greater fullness. Insulating properties depend upon conductivity and radiation. These are influenced by the fabric construction. Normal for removable insulation covers, fiber blankets, fire curtains, expansion joints and flue ducts.

Temp. : 550°C
Thickness : 0.8 mm. - 3.0 mm.
Width : 1000 mm. - 1500 mm.
Length : 30 m.

